


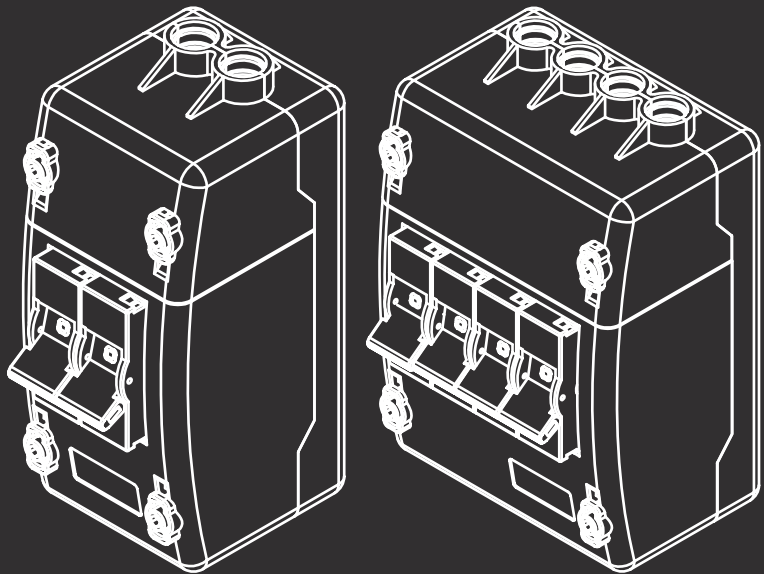

PCIL005-V1

Proteus Switchgear - Consumer Unit Division:
01527 517117 or email us at cons@proteusswitchgear.co.uk

5




METER ISOLATOR SWITCHES

INSTALLATION INSTRUCTIONS

POWERUP

ISOLATOR FITTING


1. Locate the upper din rail return on the underside of the isolator onto the upper wall of the din rail.
2. Push the isolator down to compress the springs located on the underside of the isolator.
3. Push the isolator back onto the lower wall of the din rail and to ensure the lower fixed din rail clips have located under the din rail wall. To remove the isolator, repeat the above instruction in the reverse order.

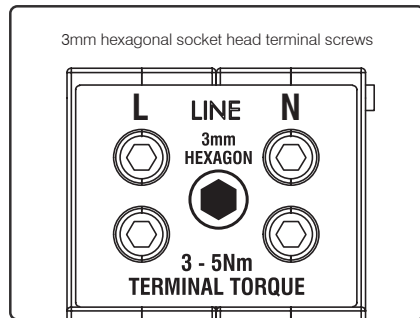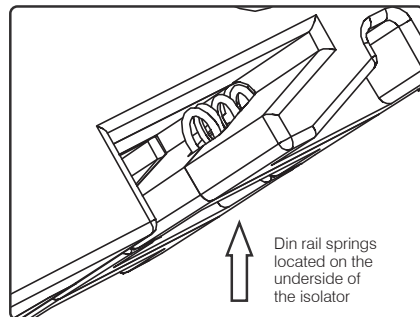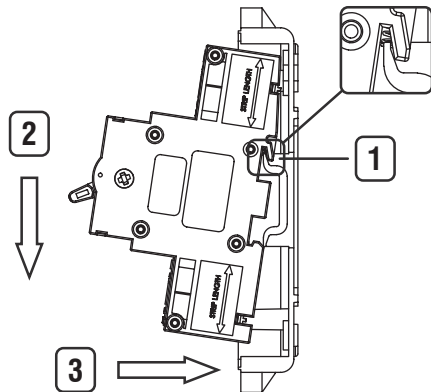


CABLE STRIPPING DETAILS

Strip the cable insulation to the required dimensions shown below.

For 16mm² cable, use the additional cable grip insert moulding to secure cable after breaking off blanking disc.

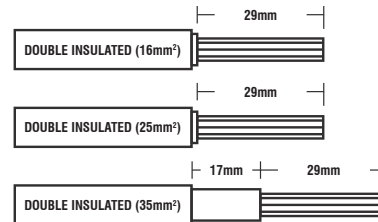


ADDITIONAL CABLE GRIP INSERT MOULDING

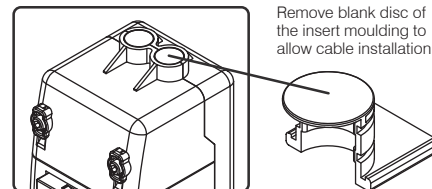

SECURITY TAG FITTING

Fit the security tag through the cover moulding and the hole in the tamper proof screw.

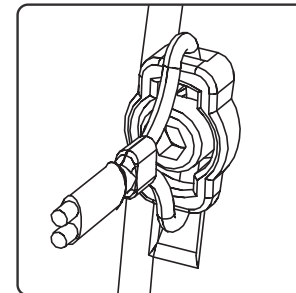

P



PCIL005-V2