

Product Code	Product Range	Issue No.	Issue Date	Issue By
U100S4P	U range	C	Nov 2025	T.T.

Description

100A Four Pole Switch
Disconnecter Suitable for Isolation

Features


Early make, late break neutral switching.
Door interlocked, insulated handle.
Padlock facility.
Robust metal enclosure.
Quad break, phase contact configuration.




General Characteristics

Standards	BS EN 60947-3. BS EN 60947-1.		
Current Rating (In) at 40°C	100A		
Utilization category. IEC 60947-3.			
415 VAC	100A – AC21 A.	100A – AC22 A.	100A – AC23 A.
500 VAC	100A – AC21 A.	100A – AC22 A.	100A – AC23 A.
690 VAC	100A – AC21 A.	100A – AC22 A.	100A – AC23 A.
Utilization category. A = frequent operation. B = infrequent operation.			
No. of Poles	4		
Rated Insulation Voltage (Ui) AC 50-60Hz	1000V		
Rated Impulse Withstand Voltage (Uimp)	8 kV		
Frequency	50 / 60Hz		
Fused protected Short Circuit current (Icc)	65 kA - 100A gG		
Polarity	Bi-directional		
Terminal Cable Capacity	50mm.sq. M8 bolted connection. 95mm.sq. with spreader box.		
Terminal Tightening Torque	20Nm.		
Ingress Protection (IP)	3X		
Mechanical operations	10000.		
Weight kg	11.9kg		
Pollution Degree	3		
Switching positions	O – I (OFF - ON).		
EMC environment	A		
Neutral pole (AC 20)	Fully rated		

Dimensions

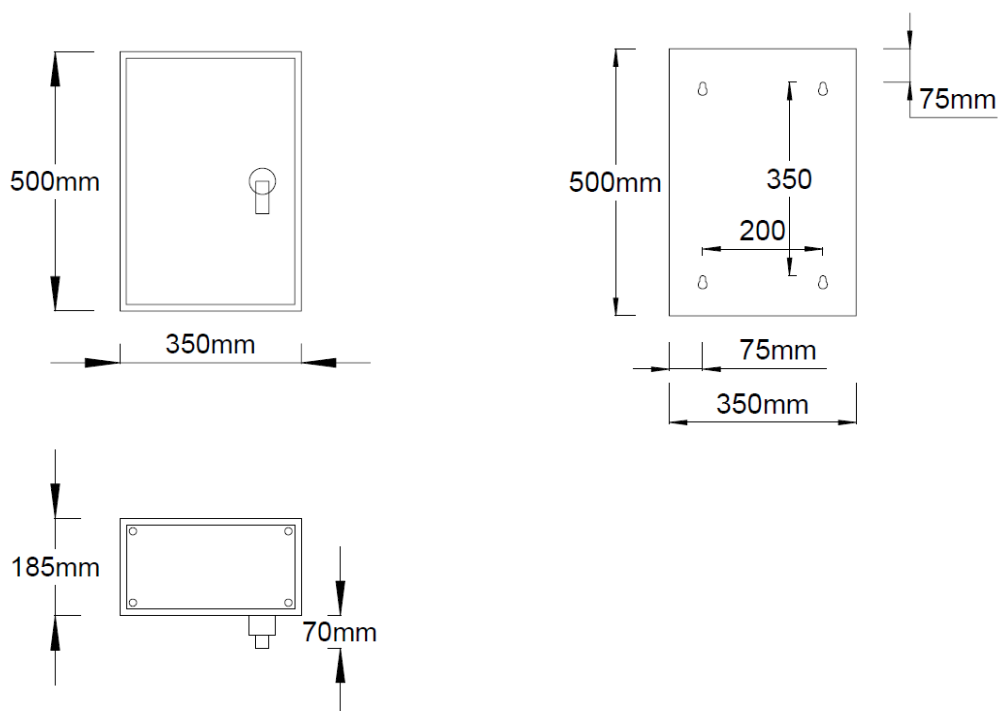

Switching



Additional information

Usage	Intended for use by skilled persons or instructed persons.
Physical	Ambient operating temperature -5 to 40 °C (Not exceeding average of 35 °C in any 24-hour period). Maximum altitude 2000m.
DC rating	Up to 600V. Refer to technical department.
Installation	Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use and dry conditions and NOT where high levels of humidity and temperature are experienced. Note: IP rating of enclosures can be compromised if correct use of glands is not followed when installing unit.
Accessories	UCB1 - Cable spreader box. Height 200mm, width 350mm, depth 185mm. Switch gland plate fits onto end of spreader box.