


Product Code	Product Range	Issue No.	Issue Date	Issue By
PEBTL12/800	Earth Bars	B	August 2026	T.T.

Description

12-way earth bar for wall or surface mounting. A Test Link is fitted to allow disconnection of the circuit earths from the main earth cable.
Suitable for switchroom main earth bars.

Features

High fault level.
High conductivity copper.

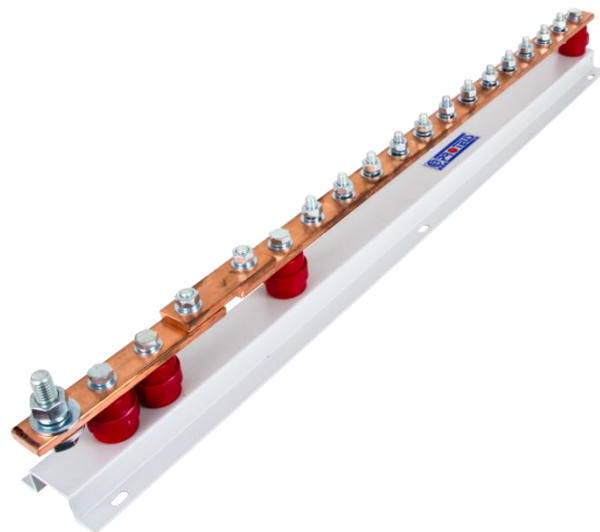

General Characteristics

Standards: Electrical	BS EN 61439-1.
Copper	BS EN 13061.
Current Rating (Ith)	800A
Voltage Rating	400V systems
Fault Current Rating – 1 second	30kA
Peak Current – Ipk	63kA
Copper bar size / CSA	30 x 10mm / 300mm ²
Pollution Degree	III
Main Earth connection bolt.	M12
Torque	54 – 56Nm.
Number of circuit connections.	12 x M8 bolts.
Torque.	20Nm.
Bolt pitch (centre – centre).	35mm.
Number of Test Links	1
Equipment Type	Fixed
Approx. Weight (kg)	3.45

Mounting bracket fixing holes

